


FEATURES:

Features	ASAPVC	APVC	UPVC
Corrosion resistance	Best	Better	Good
Sound heat insulation	Best	Best	Best
Weather resistance	Best	Better	Good
Structure	2,3,4layer	3layer	1,2,3layer
Warranty	25 years	15 years	10 years
Price	High	Middle	Economic

APPLICATION:

Factory building, warehouse, farm, residential buildings, Pre fabricated house, sheds, car parks. Especially for heavy industrial factories, such as ceramic factory, soy sauce factory, printing and dyeing factory, organic solvent factory, leather factory and so on.

INSTALLATION GUIDELINE

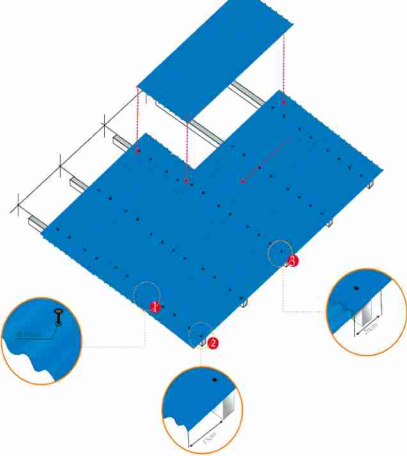

A Roof Model of Industrial Building



Tile thickness	Span of sloping roof purline	Span of arch covering purline
≤1.3mm	≤600mm	≤800mm
1.3mm<thickness≤1.8mm	≤800mm	≤900mm
1.8mm<thickness≤3.0mm	≤900mm	≤1000mm

COMPANY PROFILE

Foshan Yuehao Building Materials Technology Co.,Ltd is an ISO 9001:2008 certified company, specialized in researching, developing, manufacturing and supplying roofing tile in China over 16years.

Products range: Yuehao resin roof tile(with ASA coating), ASAPVC roof tile, APVC roof tile, UPVC roof tile, which are widely used in home and industrial construction.

CERTIFICATE



PROJECTS



YUEHAO ROOF TILE
ISO 9001:2008



Professional Roof Tile Manufacturer

- ☐ ASA Synthetic Resin Long Life Span Roof Tile
- ☐ ASA PVC Anti Aging Roof Tile
- ☐ APVC Corrosion Proof Tile
- ☐ UPVC Insulation Tile
- ☐ PVC Translucent Tile

FOSHAN YUEHAO BUILDING
MATERIALS
TECHNOLOGY CO.,LTD



ASA SYNTHETIC RESIN LONG LIFE SPAN ROOF TILE
--30YEARS LIFE WARRANTY,10 YEARS COLOR WARRANTY




Thickness	Width	Length	Wave Space	Wave Height	Pitch	Purlin	Color
2.4mm to 3.5mm	1050mm	Customized,must be times of 219mm	160mm	30mm	219mm	660mm	Customized

PRODUCT FEATURES

- ★ Water Proof
- ★ Long Life Span
- ★ Self-clean
- ★ Flame Retardant
- ★ Fast Installation
- ★ Corrosion Proof
- ★ Heat & Sound Insulation
- ★ Environment Friendly And Energy Saving
- ★ Light Weight
- ★ Impact Resistance And Low Temperature Resistance
- ★ Rich Color And Long Color Lasting



- Purlines can be square pipe (60mmx40mmx3mm) or C-shaped steel (100mmx50mmx20mmx3mm) or corrosion-resistant wood beam (60x40mm). The purline spacing is 660mm, arranged from bottom to top.
- Main tile should be installed according to local wind direction, to be opposite to wind direction. Lap with a tile wave, with both sides done at the same time.
- When installing main ridge tiles, please cut out a section of the first tile before installing.
- The lap joints of the main ridge tiles and the slope ridge tiles should be neatened. Install the tee-joint tiles after completion of installation of the main ridge tiles and the slope ridge tiles.
- Fixing parts are special parts. When fixing, first use electric drill to make holes and keep the hole diameter 2mm bigger than screw. Tapping screws with diameter of 6.3mm are recommended.

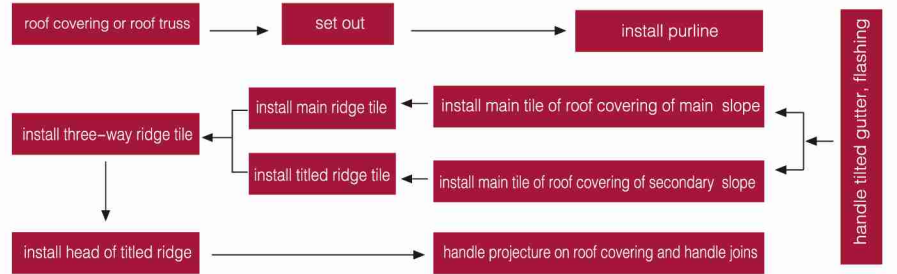

APPLICATION

Widely used in Slope roof, villa roof, mobile house roof, pavilion roof etc.

ASAPVC ANTI AGING ROOF TILE

--25YEARS LIFE WARRANTY,10 YEARS COLOR WARRANTY

Structure: 2 layers, 3 layers,4 layers

Thickness: 2.0mm, 2.5mm,3.0mm, length customized. Various color available.




APVC CORROSION PROOF TILE

--15YEARS LIFE WARRANTY

Structure: 2 layers,3 layers

Thickness :1.5mm,1.8mm,2.0mm, 2.5mm,3.0mm, length customized.

Various color available.

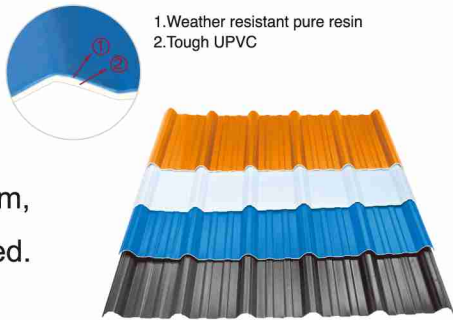


UPVC INSULATION TILE

--10YEARS LIFE WARRANTY

Structure: 1 layer ,2 layers, 3 layers

Thickness: 1.0mm,1.5mm, 1.8mm, 2.0mm, 2.5mm, 3.0mm, length customized. Various color available.

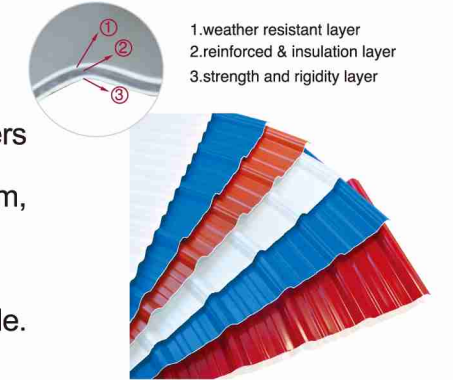

PVC TRANSLUCENT TILE

--10YEARS LIFE WARRANTY

Structure: 1 layer

Thickness: 1.0mm,1.5mm,1.8mm, 2.0mm, 2.5mm, 3.0mm, length customized. Various color available.



You can choose the ASAPVC/ APVC / UPVC roofing sheet from following designs:

